



TESNIT® BA-203

TESNIT® BA-203 has good thermal resistance. It has been designed for less demanding applications, particularly for shipbuilding.



PROPERTIES

SUPERIOR			
EXCELLENT			
VERY GOOD	THERMAL RESISTANCE		
GOOD	MECHANICAL RESISTANCE	SEALABILITY PERFORMANCE	CHEMICAL RESISTANCE
MODERATE			

APPROPRIATE INDUSTRIES & APPLICATIONS

- GENERAL PURPOSE
- WATER SUPPLY
- SHIPBUILDING

Composition	Aramid fibers, inorganic fillers, NBR binder Optional steel wire mesh reinforcement
Color	Yellow
Approvals	DNV GL


TECHNICAL DATA

 Typical values for a thickness of 2 mm

Density	DIN 28090-2	g/cm ³	1.8
Compressibility	ASTM F36J	%	10
Recovery	ASTM F36J	%	60
Tensile strength	ASTM F152	MPa	8
Stress resistance	DIN 52913		
50 Mpa, 175 °C, 16 h		MPa	25
50 Mpa, 300 °C, 16 h		MPa	/
Specific leak rate	DIN 3535-6	mg/(s·m)	0.08
Thickness increase	ASTM F146		
Oil IIRM 903, 150 °C, 5 h		%	8
ASTM Fuel B, 23 °C, 5 h		%	10
Compression modulus	DIN 28090-2		
At room temperature: ϵ_{KSW}		%	/
At elevated temperature: $\epsilon_{WSW/200\text{ }^{\circ}\text{C}}$		%	/
Creep relaxation	DIN 28090-2		
At room temperature: ϵ_{KRW}		%	/
At elevated temperature: $\epsilon_{WRW/200\text{ }^{\circ}\text{C}}$		%	/
Max. operating conditions			
Peak temperature		°C/°F	250/482
Continuous temperature		°C/°F	200/392
- with steam		°C/°F	160/320
Pressure		bar/psi	50/725

P-T DIAGRAM

EN 1514-1, Type IBC, PN 40, DIN 28091-2 / 3.8, 2.0 mm

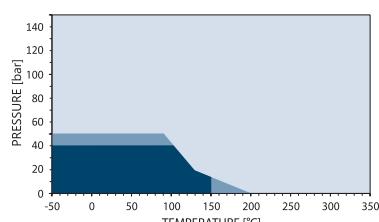

- General suitability - Under common installation practices and chemical compatibility.
- Conditional suitability - Appropriate measures ensure maximum performance for joint design and gasket installation. Technical consultation is recommended.
- Limited suitability - Technical consultation is mandatory.

P-T diagram indicates the maximum permissible combination of internal pressure and service temperature which can be simultaneously applied for a given gasket's thickness, size and tightness class. Given the wide variety of gasket applications and service conditions, these values should only be regarded as a guidance for the proper gasket assembly. In general, thinner gaskets exhibit better P-T properties.


Surface finish	Standard: 2AS. Optional: graphite or PTFE
Sheet dimensions	Size (mm): 1500 x 1500 3000 x 1500 4500 x 1500 Thickness (mm): 0.5 1.0 1.5 2.0 3.0 Other sizes and thicknesses available on request
Tolerances	On length and width: ± 5 % On thickness up to 1.0 mm: ± 0.1 mm On thickness above 1.0 mm: ± 10 %

Acetamide	+	Dioxane	-	Oleic acid	+
Acetic acid, 10%	+	Diphyl [Dowtherm A]	+	Oleum [Sulfuric acid, fuming]	-
Acetic acid, 100% (Glacial)	-	Esters	○	Oxalic acid	○
Acetone	○	Ethane [gas]	+	Oxygen [gas]	-
Acetylene [gas]	+	Ethers	○	Palmitic acid	+
Acid chlorides	-	Ethyl acetate	○	Paraffin oil	+
Acrylic acid	○	Ethyl alcohol [Ethanol]	+	Pentane	+
Acrylonitrile	-	Ethyl cellulose	○	Perchloroethylene	-
Adipic acid	+	Ethyl chloride [gas]	-	Petroleum [Crude oil]	+
Air [gas]	+	Ethylene [gas]	+	Phenol [Carbolic acid]	-
Aldehydes	○	Ethylene glycol	+	Phosphoric acid, 40%	○
Alum	+	Formaldehyde [Formalin]	○	Phosphoric acid, 85%	-
Aluminium acetate	+	Formamide	○	Phthalic acid	+
Aluminium chloride	○	Formic acid, 10%	+	Potassium acetate	+
Aluminium chloride	○	Formic acid, 85%	○	Potassium bicarbonate	+
Aluminium sulfate	○	Formic acid, 100%	-	Potassium carbonate	+
Amines	-	Freon-12 [R-12]	+	Potassium chloride	+
Ammonia [gas]	○	Freon-134a [R-134a]	+	Potassium cyanide	+
Ammonium bicarbonate	+	Freon-22 [R-22]	○	Potassium dichromate	○
Ammonium chloride	+	Fruit juices	+	Potassium hydroxide	○
Ammonium hydroxide	+	Fuel oil	+	Potassium iodide	+
Amyl acetate	○	Gasoline	+	Potassium nitrate	+
Anhydrides	○	Gelatin	+	Potassium permanganate	○
Aniline	-	Glycerine [Glycerol]	+	Propane [gas]	+
Anisole	○	Glycols	+	Propylene [gas]	+
Argon [gas]	+	Helium [gas]	+	Pyridine	-
Asphalt	+	Heptane	+	Salicylic acid	○
Barium chloride	+	Hydraulic oil [Glycol based]	+	Seawater/brine	+
Benzaldehyde	-	Hydraulic oil [Mineral type]	+	Silicones [oil/grease]	+
Benzene	+	Hydraulic oil [Phosphate ester based]	○	Soaps	+
Benzoic acid	○	Hydrazine	-	Sodium aluminate	+
Bio-diesel	+	Hydrochloric acid, 10%	○	Sodium bicarbonate	+
Bio-ethanol	+	Hydrochloric acid, 37%	-	Sodium bisulfite	+
Black liquor	○	Hydrofluoric acid, 10%	-	Sodium carbonate	+
Borax	+	Hydrofluoric acid, 48%	-	Sodium chloride	+
Boric acid	+	Hydrogen [gas]	+	Sodium cyanide	+
Butadiene [gas]	+	Iron sulfate	+	Sodium hydroxide	○
Butane [gas]	+	Isobutane [gas]	+	Sodium hypochlorite [Bleach]	○
Butyl alcohol [Butanol]	+	Isooctane	+	Sodium silicate [Water glass]	+
Butyric acid	+	Isoprene	+	Sodium sulfate	+
Calcium chloride	+	Isopropyl alcohol [Isopropanol]	+	Sodium sulfide	+
Calcium hydroxide	+	Kerosene	+	Starch	+
Carbon dioxide [gas]	+	Ketones	○	Steam	+
Carbon monoxide [gas]	+	Lactic acid	○	Stearic acid	+
Cellosolve	○	Lead acetate	+	Styrene	○
Chlorine [gas]	-	Lead arsenate	+	Sugars	+
Chlorine [in water]	+	Magnesium sulfate	+	Sulfur	○
Chlorobenzene	○	Maleic acid	○	Sulfur dioxide [gas]	○
Chloroform	-	Malic acid	○	Sulfuric acid, 20%	-
Chloroprene	○	Methane [gas]	+	Sulfuric acid, 98%	-
Chlorosilanes	-	Methyl alcohol [Methanol]	+	Sulfuryl chloride	-
Chromic acid	-	Methyl chloride [gas]	○	Tar	+
Citric acid	○	Methylene dichloride	○	Tartaric acid	○
Copper acetate	+	Methyl ethyl ketone [MEK]	○	Tetrahydrofuran [THF]	-
Copper sulfate	+	N-Methyl-pyrrolidone (NMP)	○	Titanium tetrachloride	-
Creosote	○	Milk	+	Toluene	+
Cresols [Cresylic acid]	-	Mineral oil [ASTM no.1]	+	2,4-Toluenediisocyanate	○
Cyclohexane	+	Motor oil	+	Transformer oil [Mineral type]	+
Cyclohexanol	+	Naphtha	+	Trichloroethylene	-
Cyclohexanone	○	Nitric acid, 10%	-	Vinegar	+
Decalin	+	Nitric acid, 65%	-	Vinyl chloride [gas]	-
Dextrin	+	Nitrobenzene	-	Vinylidene chloride	-
Dibenzyl ether	○	Nitrogen [gas]	+	Water	+
Dibutyl phthalate	○	Nitrous gases [NOx]	○	White spirits	+
Dimethylacetamide (DMA)	○	Octane	+	Xylenes	+
Dimethylformamide (DMF)	○	Oils [Essential]	+	Xylenol	-
		Oils [Vegetable]	+	Zinc sulfate	+

All information and data quoted are based upon decades of experience in the production and operation of sealing elements. This data may not be used to support any warranty claims. With its publication this latest edition supersedes all previous issues and is subject to change without further notice.

σ_{BO} DIAGRAM

DIN 28090-1

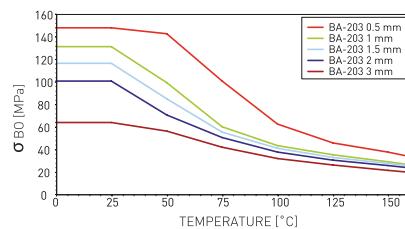

σ_{BO} diagram represents σ_{BO} values for different gasket material thicknesses. These values indicate the maximum in-service compressive pressures which can be applied on the gasket area involved without destroying or damaging the gasket material.

CHEMICAL RESISTANCE CHART

The recommendations made here are intended as a guideline for the selection of a suitable gasket type. As the function and durability of products are dependent upon a number of factors, the data may not be used to support any warranty claims. If there are specific type-approval regulations, these have to be complied with.

- + Recommended
- Recommendation depends on operating conditions
- Not recommended



DONIT TESNIT, d.o.o.

Cesta komandanta Staneta 38
1215 Medvode, Slovenia, EU

Phone: +386 (0)1 582 33 00
Fax: +386 (0)1 582 32 06
+386 (0)1 582 32 08

Web: www.donit.eu
E-mail: info@donit.eu

For disclaimer please visit <http://donit.eu/disclaimer/>

Copyright © DONIT TESNIT, d.o.o.

All rights reserved

Date of issue: 06.2020 / TDS-BA203-05-2015